


Vinyl Window Sticker Application Instructions

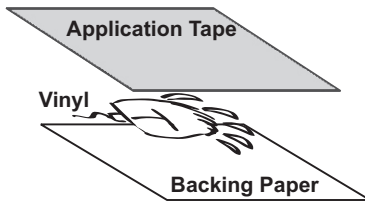


Your sticker comes as 3 layers...A backing paper, the vinyl design and a layer of application tape (looks like masking tape) that holds the design in place.

This sticker is made from premium sign vinyl and should last 4-6 years if properly applied.


Surface should be between 50°F and 90°F. Do not apply in direct sunlight. Surface should be smooth and in good condition. If applying over a newly painted surface, wait at least 90 days for the paint to fully cure.

You will need masking tape, squeegee or credit card and cleaner or alcohol.


Using a lint-free cloth, thoroughly clean the surface with a non-ammonia household or glass cleaner. Rubbing alcohol works great for removing grease and wax.




Place the sticker into position and after making sure it's straight, place a tape strip across the top, half on the surface and half on the sticker, creating a hinge.

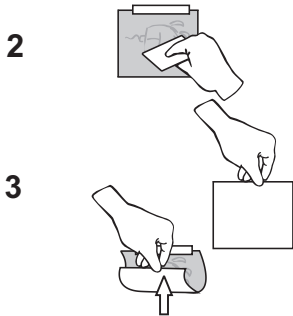


Using a credit card, squeegee across the sticker to insure the application tape adheres to the vinyl. Hold the card at a 45° angle and stroke from the center of the sticker outward.

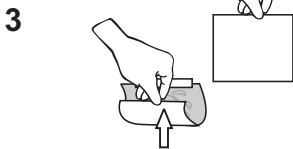

Using the tape as a hinge, flip the sticker up so the back is facing out.



Carefully remove the backing paper. If the vinyl still sticks to the paper, lower it back in place and repeat step 2. Try pulling paper back at a sharp angle across itself.

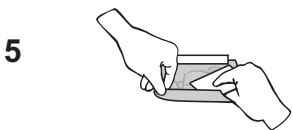

All the vinyl should be on the application tape. Carefully lower it to the surface while you squeegee it in place. Remember to move from the center of the sticker out to the edges to remove air bubbles. Note that once the vinyl touches the surface, it cannot be repositioned without ruining the sticker.



Starting at a corner, pull the tape at a sharp angle back across itself. If bits of vinyl still stick to the tape, lower tape and squeegee again.



That's it. Admire your new sticker, go online and order more.